

Welcome

This Quick Start Guide provides all the information you need to get your product up and running. Please fully unfold this guide and follow the numbered steps below. If you need more detailed instructions, a full user guide is available to download in PDF format from www.bt.com/help/userguides

We haven't printed a full user guide as we're working to make our products greener, so please consider the environment before printing.

If you cannot find the answer to your problem in the full online user guide, then please call the Helpline on 0871 594 1200* or email bt.helpdesk@suncorptech.com

BT is a sustainability leader

To find out how we're making our products greener visit

bt.com/betterworld/products


1 Getting started

Place your BT Domus within 2 metres of the mains power socket and telephone socket so that the cables will reach.

The handset range is up to 300 metres outdoors and 50 metres indoors (in ideal conditions). Try to position the phone at least 1 metre away from other electrical appliances to avoid interference and help maximise the handset range. The icon indicates when you are in range; the handset will beep every minute if you go out of range.

Setting up

1. Plug the mains power adaptor (item code 040497) into the socket marked on the underside of the base and plug the other end into the mains power socket and switch the power on.
2. Plug the telephone line cord into the socket marked . **Only use the cables provided.**
3. Insert the rechargeable battery supplied into the handset. Then slide the battery compartment cover into place.
4. Place the handset on the base to charge for at least 24 hours. Once the handset has enough charge to switch on, the display will flash **BASE 1** as the handset registers with the base and then changes to the standby screen.
5. When the handset is fully charged the icon will be displayed. Now you can plug the telephone line cord into the telephone wall socket.

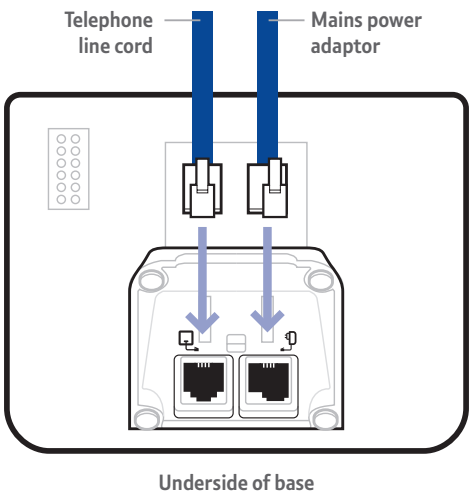

Set up your additional handsets (multiple pack owners only)

1. For each additional handset and charger: Plug the mains power adaptor (item code 032765) into the socket marked on the underside of the charger and plug the other end into the mains power socket and switch on.
2. Insert the rechargeable battery supplied and charge the handset batteries for at least 24 hours as detailed in points 3 and 4 above.

Any additional handsets supplied as part of a multipack are pre-registered to the base so, once charged, are ready for use. The handset number is shown in the display.

Set the date and time

The date and time is recorded with each answering machine message you receive, so before you receive your first message you need to set the correct date and time.


1. Press **Menu** and press to scroll down to **Clock & Alarm**, then press **Select**.
2. Scroll to **Set Time** and press **OK**.
3. Enter the time using the 12 hour clock and press **OK**.
4. Scroll to **Set Date** and press **OK**.
5. Enter the correct date using the format DD/MM/YY, eg. **09 06 07** for 9 June 2007 and press **OK**. Then press to return to standby.

Your BT Domus is now ready for use.

2 Navigating the menus

Your BT Domus has an easy to use menu system through which you can access many of the phones features and settings. These are shown in the menu map below.

1. From the standby screen, press **Menu** to open the main menu and then use the and buttons to scroll up and down through the menu options displayed.
 2. Press **Select** to select a menu option or **Back** to go back to the previous screen.
- Press to exit a menu at any time and return to standby.

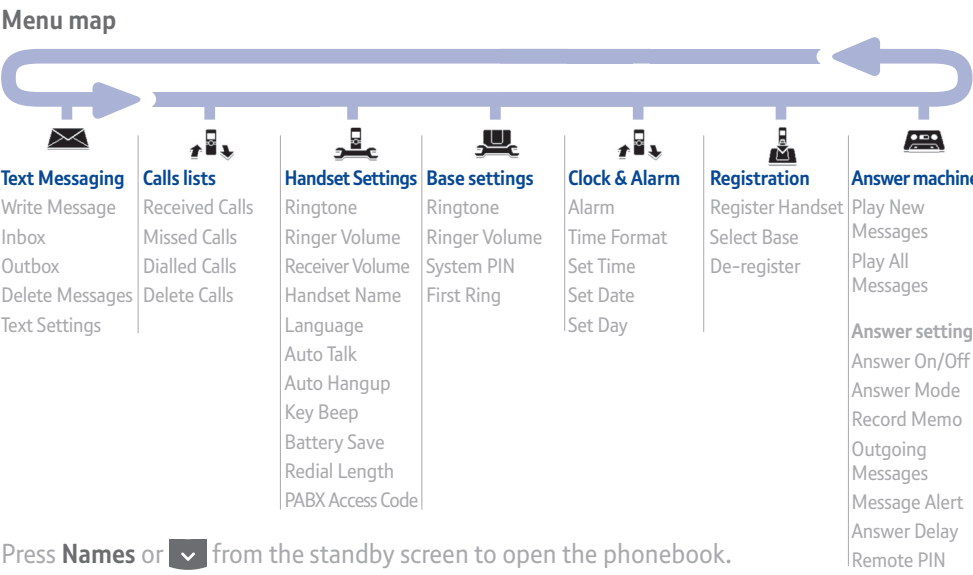

Press **Names** or from the standby screen to open the phonebook.

Press from the standby screen to open the received calls list.

3 Making and receiving calls

Make/end a call

1. Press , listen for the dialling tone, then dial the number. To end the call, press , or replace the handset on the base or charger.

Preparatory dialling

1. Dial the number first. If you make a mistake press **Clear** to delete the last digit. Press to dial.

Handsfree

1. **During a call**, press to switch the call between the earpiece and the handset speaker.

Secrecy

You can mute the handset microphone and talk without your caller hearing you.

1. **During a call**, press **Secrecy**. **Secrecy On** is displayed and you can talk without your caller hearing you. Press **Off** to switch secrecy off and resume your call.

Receiving calls

1. To answer the call press . Or if the handset is on the base or charger, simply lift it from the base to answer the call.

Redial

Your BT Domus stores the last 20 numbers you have dialled. You can then select any of the numbers to redial, delete or copy to the phonebook.

1. Press , the most recently dialled number is displayed. Press or to scroll through the list and press to redial the number displayed.

4 Special features

Your BT Domus has some special features, these include a 255 name and number phonebook, a SIM card reader, an answering machine and SMS text messaging.

Phonebook

You can store up to 255 names and numbers in the phonebook to make dialling quick and easy.

Add a new phonebook entry

1. From standby, press **Names**. The phonebook menu is displayed.
2. When storing the first entry: **Add Entry** is highlighted. Press **OK**.
When storing subsequent entries, the phonebook list is displayed with the first entry highlighted. Press **Options**. **Add Entry** is highlighted. Press **OK**.
3. Using the letters on the keypad enter the name, then press **OK**. You may need to press the same button a few times until the letter you want is displayed. For example, press **2** once for **A**, or twice for **B**. If you make a mistake, press **Clear**.
4. Enter the number and press **OK**. Display shows **Saved**.
5. Press **Back** to return to standby.

Dial a phonebook entry

1. From standby, press **Names** or . The first entry is displayed.
2. Scroll or through the phonebook, or press the relevant keypad button to search alphabetically. Press to dial the selected number.
Or you can press **Options** to view more details, copy, edit or delete the entry, or delete the entire phonebook.

Answering machine





After following the Getting started section, your BT Domus answering machine will be set to ‘Answer and Record’ and is ready to start receiving messages.

You can select one of the pre-recorded outgoing messages – Answer & Record or Answer Only or you can record your own personalised outgoing message. You can also record memo messages for other users, screen calls and you can operate the answering machine remotely.


All answering machine features are accessed via the handset menu. See the Answer Machine menu shown in Section 2. For detailed instructions on all the answering machine features see the online user guide at www.bt.com/help/userguides


Switch answering machine on/off

When the answering machine is on, the  icon is shown in the handset display.




- 1. Press **Menu**, scroll  to **Answer Machine** and press **Select**.
- 2. Scroll  to **Answer Settings** and press **Select**. **Answer On/Off** is highlighted, press **Select** again.
- 3. Press  or  to highlight **On** or **Off** and press **Select**.




Listening to your new messages/memos

When you have new messages or memos the handset displays “You have ‘x’ new messages” and the  alert.

- 1. Press **Play** to hear your **new** messages (or **Back** to save your messages for later). Your new messages are played via the handset speaker. You can press  to switch playback to the earpiece.

To listen to all your messages


- 1. Press **Menu**, scroll  to **Answer Machine** and press **Select**.
- 2. Press  or  to highlight **new** or **all** messages and press **Select**.

During playback, press:  **once** to repeat the message or **twice** to play the previous message,  to play the next message, **Delete** to delete the current message, or  to cancel playback and return to standby.

SIM card reader

Your BT Domus has a SIM card reader which allows you to copy entries from a SIM card to the Domus phonebook. **Note: 3G and 5V SIM cards are not compatible.**

Copy all phonebook entries from a SIM card

- 1. Insert the SIM card into the SIM drawer on the top of the base, as shown on the drawer. **Make sure the SIM card clicks securely in place before closing the drawer.**
- 2. Press **Names** then **Options**. Then scroll  to **Copy from SIM** and press **OK**. If requested, enter your SIM card PIN then press **OK**. The phonebook entires are copied. For each entry, the handset displays the position of the entry in the SIM and the name being copied.

Text messaging

Before you can send and receive text messages you need to subscribe to the text messaging service (no subscription charge) and to Caller Display (a quarterly fee may be payable, check with your network provider). Please see the online full user guide for details.

To subscribe to the text messaging service

You will be automatically registered when you send your first text message or you can send the word ‘Register’ to **00000**. You will receive a welcome message back as confirmation.

To access the text messaging menu:

Press **Menu**. **Text Messaging** is displayed, press **Select**. Now use  or  to scroll through the menu options: Write Message, Inbox, Outbox, Delete Messages, Text Settings.

For a full explanation of features and instructions, please see the main user guide online at www.bt.com/help/userguides

Troubleshooting

Most problems are caused by something very simple and can be fixed with a few simple checks:

- Make sure both the mains power adaptor cable and telephone line cord are plugged into the correct sockets and plugged in at the wall.
- Make sure you use all the cables and battery pack that came in the box, not those from a previous product.
- If you experience poor speech quality or interference, make sure the product is not located too close to other electrical appliances. This can also help improve the handset range from the base.
- Make sure you charge the battery pack for at least 24 hours before first use to ensure maximum battery performance. The charge capacity of the batteries will decrease over time.

Using your BT Domus on a broadband Internet enabled line?

Remember to plug the phone into the wall socket via an ADSL microfilter if you have broadband Internet on your phone line, otherwise you may have problems with this product and your broadband service. Additional BT ADSL microfilters can be purchased from www.shop.bt.com

General information

For information on safety instructions, cleaning, technical information or connecting to a switchboard, please refer to the ‘General Information’ section in the full user guide at www.bt.com/help/userguides

Guarantee

Your BT Domus is guaranteed for a period of 12 months from the date of purchase.

Subject to the terms listed below, the guarantee will provide for the repair of, or at BT’s or its agent’s discretion the option to replace the BT Domus, or any component thereof, (other than batteries), which is identified as faulty or below standard, or as a result of inferior workmanship or materials. Products over 28 days old from the date of purchase may be replaced with a refurbished or repaired product.

The conditions of this guarantee are:

- The guarantee shall only apply to defects that occur within the 12 month guarantee period.
- Proof of purchase is required.
- The equipment is returned to BT or its agent as instructed.

This guarantee does not cover any faults or defects caused by accidents, misuse, fair wear and tear, neglect, tampering with the equipment, or any attempt at adjustment or repair other than through approved agents.

This guarantee does not affect your statutory rights.

For further information within and outside the 12 month guarantee, please refer to the full user guide at www.bt.com/help/userguides

Product disposal instructions



The symbol shown here and on the product means that the product is classed as Electrical or Electronic Equipment and should not be disposed with other household or commercial waste at the end of its working life.

The Waste of Electrical and Electronic Equipment (WEEE) Directive (2002/96/EC) has been put in place to recycle products using best available recovery and recycling techniques to minimise the impact on the environment, treat any hazardous substances and avoid the increasing landfill.

Product disposal instructions for residential users

When you have no further use for it, please remove any batteries and dispose of them and the product as per your local authority’s recycling processes. For more information please contact your local authority or the retailer where the product was purchased.

Product disposal instructions for business users

Business users should contact their suppliers and check the terms and conditions of the purchase contract and ensure that this product is not mixed with other commercial waste for disposal.

R&TTE Directive & Declaration of Conformity

This product is intended for use within the UK for connection to the public telephone network and compatible switchboards.

This equipment complies with the essential requirements for the Radio Equipment and Telecommunications Terminal Equipment Directive (1999/5/EC).

The Declaration of Conformity is published on the website <http://www.suncorptech.com/bt>

BT is a sustainability leader

To find out how we’re making our products greener visit

bt.com/betterworld/products

Offices worldwide

The services described in this publication are subject to availability and may be modified from time to time. Services and equipment are supplied subject to British Telecommunication’s plc’s respective standard conditions of contract. Nothing in this publication forms any part of a contract.

© British Telecommunications plc 2008.
Registered Office: 81 Newgate Street, London EC1A 7AJ.
Registered in England No. 1800000.

Designed and produced by The Art & Design Partnership Ltd.

Printed in China / Issue 2 / ADP01-08



BT Domus Quick Start Guide



A full user guide can be downloaded in PDF format from www.bt.com/help/userguides
Please consider the environment before printing.



This guide can be recycled.